


DRAM for Every Design

Micron® DRAM Module Form Factors Quick Reference Guide

Accelerate your time-to-market with quality DRAM modules rigorously tested for reliability in a wide range of applications. From the cost-sensitive needs of consumer computing to the extreme temperature and performance needs of industrial applications to the exacting specifications of enterprise systems, we have the right solution for your design.

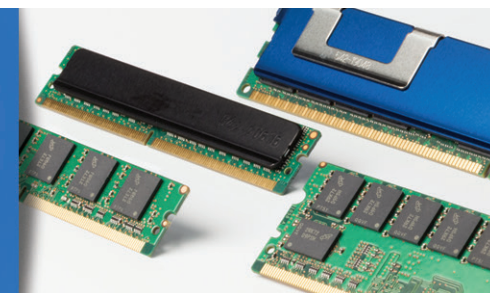

Form Factor	Available ¹ Technologies	Available ¹ Densities	Bus Width ²	Data Rate (MT/s)
UDIMM (unbuffered DIMM) ECC- and non-ECC-supported systems with no size constraints	DDR2, DDR3, DDR4	512MB to 16GB	x64/x72	667 to 2933
SODIMM (small outline DIMM) ECC- and non-ECC-supported, space-sensitive systems	DDR2, DDR3, DDR4	256MB to 16GB	x64/x72	667 to 2933
RDIMM (registered DIMM) ECC-supported networking, enterprise servers, and workstations	DDR2, DDR3, DDR4	512MB to 32GB	x72	400 to 2666
SORDIMM (small outline registered DIMM) Small networking form factors and micro servers	DDR2, DDR3	512MB to 16GB	x72	667 to 1600
LRDIMM (load-reduced DIMM) Highest-density enterprise server and DDR3/DDR4 networking systems	DDR3, DDR4	16GB to 64GB	x72	1333 to 2666
FBDIMM (fully buffered DIMM) Highest-density enterprise server DDR2 systems	DDR2	1GB to 8GB	x72	667 to 800
VLP RDIMM (very low profile registered DIMM) Blade servers and networking ATCA height-compatible systems requiring ECC modules	DDR2, DDR3, DDR4	512MB to 16GB	x72	667 to 2666
VLP UDIMM (very low profile unbuffered DIMM) Blade servers and networking ATCA height-compatible systems requiring ECC modules	DDR3, DDR4	2GB to 16GB	x72	1333 to 2666
Mini-RDIMM (mini registered DIMM) Networking and other size-constrained systems requiring ECC modules	DDR2, DDR3, DDR4	512MB to 16GB	x72	667 to 2666
Mini-UDIMM (mini unbuffered DIMM) Networking and other size-constrained systems requiring ECC modules	DDR3	2GB to 8GB	x72	1333 to 1600
VLP Mini-RDIMM (very low profile mini registered DIMM) Networking ATCA height-compatible and other size-constrained systems requiring ECC modules	DDR2, DDR3, DDR4	512MB to 8GB	x72	667 to 2666
VLP Mini-UDIMM (very low profile mini unbuffered DIMM) Networking ATCA height-compatible and other size-constrained systems requiring ECC modules	DDR3, DDR4	2GB to 8GB	x72	1333 to 2666

¹Available = sampling or in production; ²All x72 modules are ECC-enabled

Device and Form Factor		Density	Pin Count	Width	Voltage	Data Rate	RoHS	PCB Dimensions
DDR2	UDIMM	512MB to 4GB	240	x64/x72	1.8V	667 to 800 MT/s	Yes, Green	133.35mm L x 30mm H
	SODIMM	256MB to 4GB	200	x64	1.8V	667 to 800 MT/s	Yes, Green	67.6mm L x 30mm H
	RDIMM	512MB to 8GB	240	x72	1.8V	667 to 800 MT/s	Yes, Green	133.35mm L x 30mm H
	SORDIMM	512MB to 2GB	200	x72	1.8V	667 to 800 MT/s	Yes	67.6mm L x 30mm H
	FBDIMM	1GB to 8GB	240	x72	1.8V	667 to 800 MT/s	Yes	133.35mm L x 30.35mm H
	VLP RDIMM	512MB to 4GB	240	x72	1.8V	667 to 800 MT/s	Yes	133.35mm L x 17.9mm H
	Mini-RDIMM	512MB and 2GB	244	x72	1.8V	667 to 800 MT/s	Yes, Green	82mm L x 30mm H
	VLP Mini-RDIMM	512MB to 4GB	244	x72	1.8V	667 to 800 MT/s	Yes	82mm L x 18.2mm H
DDR3	UDIMM	1GB to 16GB	240	x64/x72	1.35V/1.5V	1333 to 2133 MT/s	Green	133.35mm L x 30mm H
	SODIMM	1GB to 16GB	204	x64/x72	1.35V /1.5V	1333 to 1866 MT/s	Green	67.6mm L x 30mm H
	RDIMM	1GB to 32GB	240	x72	1.35V/1.5V	1066 to 1866 MT/s	Green	133.35mm L x 30mm H
	SORDIMM	16GB	200	x72	1.35V	1600 MT/s	Green	67.6mm L x 30mm H
	LRDIMM	16GB to 64GB	240	x72	1.35V/1.5V	1333 to 1866 MT/s	Yes, Green	133.35mm L x 30.35mm H
	VLP UDIMM	2GB to 16GB	240	x72	1.35V/1.5V	1333 to 1600 MT/s	Green	133.35mm L x 18.75mm H
	VLP RDIMM	2GB to 16GB	240	x72	1.35V/1.5V	1333 to 1866 MT/s	Green	133.35mm L x 18.75mm H
	Mini-UDIMM	2GB to 8GB	244	x72	1.35V/1.5V	1333 to 1600 MT/s	Green	82mm L x 30mm H
	Mini-RDIMM	8GB	240	x72	1.35V	1333 MT/s	Green	82mm L x 30mm H
	VLP Mini-UDIMM	2GB to 8GB	244	x72	1.35V/1.5V	1333 to 1600 MT/s	Green	82mm L x 17.9mm H
	VLP Mini-RDIMM	4GB to 8GB	244	x72	1.35V	1333 MT/s	Green	82mm L x 17.9mm H
DDR4	UDIMM	2GB to 16GB	288	x64/x72	1.2V	2133 to 2933 MT/s	Green	133.35mm L x 31.25mm H
	SODIMM	2GB to 16GB	260	x64/x72	1.2V	2133 to 2933 MT/s	Green	69.60mm L x 30mm H
	RDIMM	4GB to 32GB	288	x72	1.2V	2133 to 2666 MT/s	Green	133.35mm L x 31.25mm H
	LRDIMM	16GB to 32GB	288	x72	1.2V	2133 to 2666 MT/s	Green	133.35mm L x 31.25mm H
	VLP RDIMM	8GB to 16GB	288	x72	1.2V	2133 to 2666 MT/s	Green	133.35mm L x 18.75mm H
	VLP UDIMM	8GB to 16GB	288	x72	1.2V	2133 to 2666 MT/s	Green	133.35mm L x 18.75mm H
	Mini-RDIMM	8GB to 16GB	288	x72	1.2V	2400 to 2666 MT/s	Green	133.35mm L x 30mm H
	VLP Mini-RDIMM	8GB	288	x73	1.2V	2666 MT/s	Green	133.35mm L x 18.75mm H
	VLP Mini-UDIMM	8GB	288	x74	1.2V	2666 MT/s	Green	133.35mm L x 18.75mm H

Products are warranted only to meet Micron's production data sheet specifications. Products, programs and specifications are subject to change without notice. Dates are estimates only. ©2012 Micron Technology, Inc. All rights reserved. All information herein is provided on an "AS IS" basis without warranties of any kind. Micron, the Micron logo, and all other Micron trademarks are the property of Micron Technology, Inc. All other trademarks are property of their respective owners.
Rev. E 8/16 CCMMD-676576390-9486

